


Light (main hall)

Light Desk	01x	MA Lightning grandMA3 light
Network	01x	Swisson 8-Port Ethernet-Switch
	03x	Swisson XND-8 DMX Node (sACN Universe 1-7 House) (sACN Universe 51-58 Guest Lines)
DMX Cabeling	04x	Lines FOH to dimmer (fix installation)
DMX Cables	20x	5-pole XLR, 3m
	12x	5-pole XLR, 5m
	08x	5-pole XLR, 10m
	08x	Hybrid Powercon/DMX 5-pole, 3m
	08x	Hybrid Powercon/DMX 5-pole, 5m
Power Distribution	04x	LSC APS 12x 10A
Dimmer	01x	LSC Gen VI 12x 10A
Lights	02x	ETC Source Four Zoom, 25 – 50°
	10x	Luxibel B Blinded
	04x	Arri 300 Plus
	08x	LED Showtec Spectral M800 Q4 Tour
	08x	LED Showtec Spectral M800 MK2
	14x	Astera AX7
	06x	Varytec 400W UV flood light
Moving Lights	30x	Robe Painte
	10x	Robe Spider
	20x	Clay Paky Mini B WW
Strobe	04x	Martin Atomic 3000 LED
	04x	Martin Atomic 3000
Hazer	01x	Showtec Mistique CO2-Hazer (MDG Based)
Fan	01x	Martin AF1
	01x	Martin AF3
Rigging Stage	01x	LD-Truss Thomas, 30.5cm × 30.5cm, 5.86m × 4.98m, black
	04x	Chain hoist, GIS EM200/1 N, 800kg (WLL = 500kg/suspension point on the empty rig)
Rigging Hall	03x	ATC SB29-4X Truss 10m with 12 × 16A swiss plugs, DMX
	06x	Chain hoist, Movecat LMK 500-5, 500kg (WLL = 350kg/suspension point on the empty rig)
Guest Power Light (Stage Left)	01x	CEE63/5 (circuit breaker D40A, no RCD)
	01x	CEE32/5 (on the same circuit breaker but with additional RCD) →Power details can be found here Link


Plots & Patch & MVR

Plots, Patches and more Infos are stored in the main Lighting-File [Link](#)
(the plots on the following pages are for illustration purposes only)

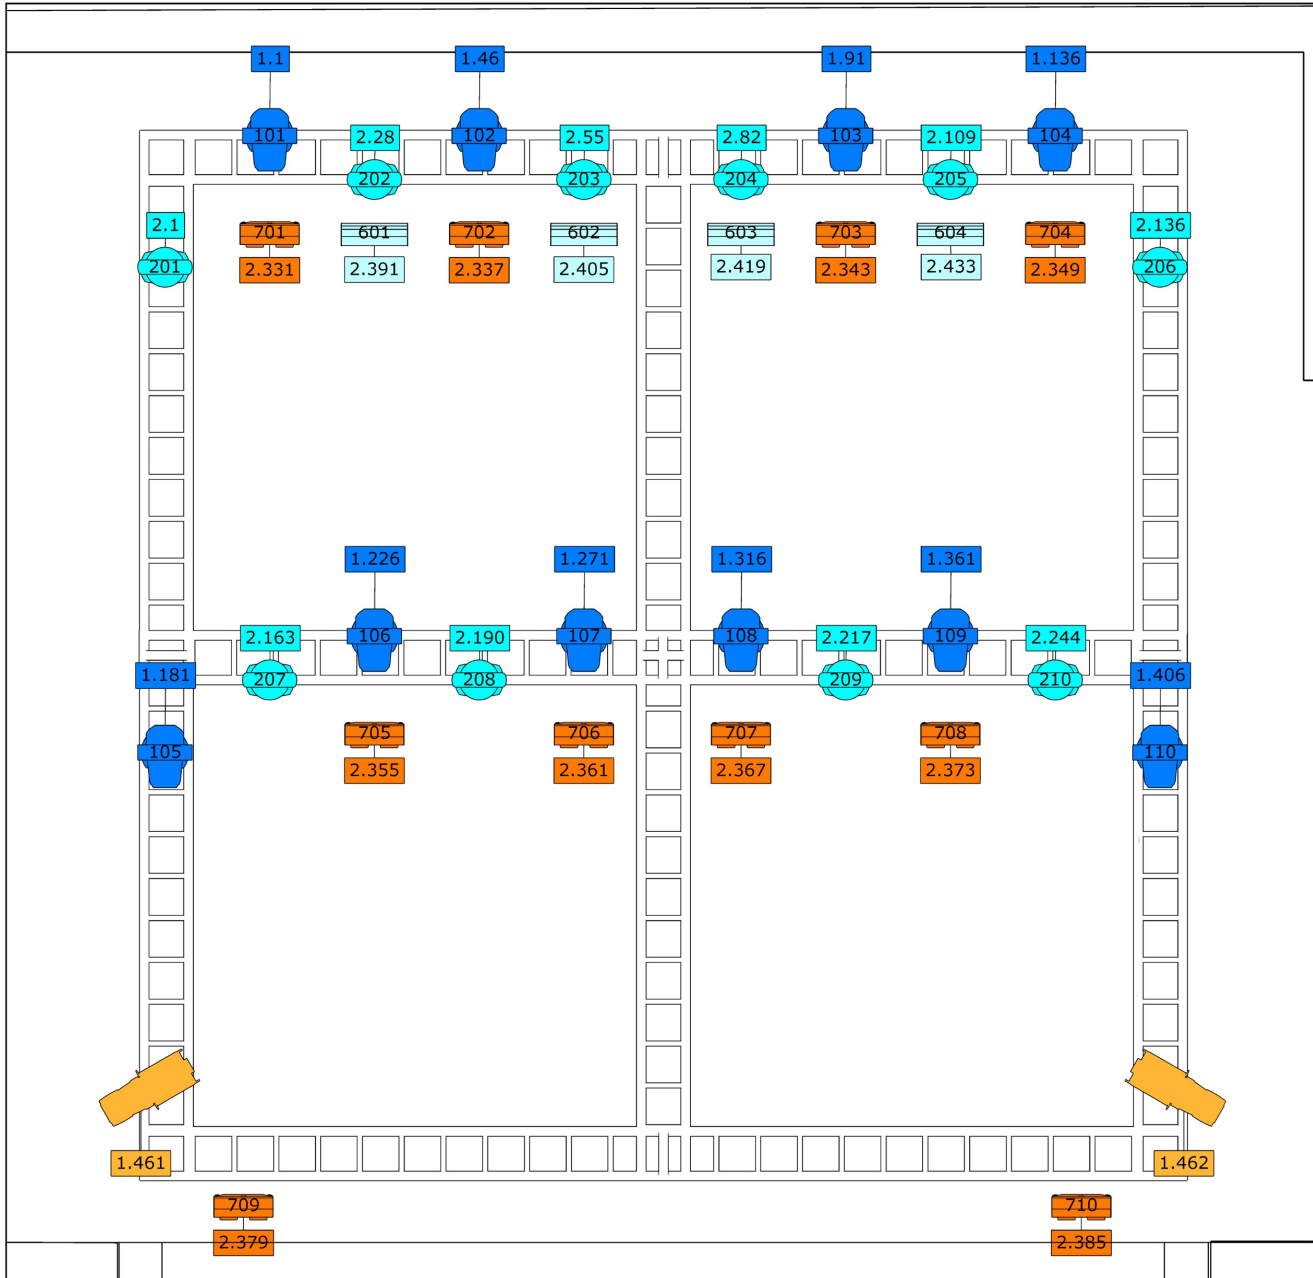


Main Desk grandMA3 light
 IP: 192.168.0.21
 House Lights grandMA3 onPC Rack
 IP: 192.168.0.141
 House sACN Nodes Swisson XND-8
 IP: 192.168.0.151
 IP: 192.168.0.152
 Guest sACN Node Swisson XND-8
 IP: 192.168.0.153
 (Universe 51-58)

Additional Floor Lamps



Symbol Schlüssel

- | | |
|--|---|
|  Robe Painte, Mode 2, 45ch (10) |  Astera AX7, Mode Dim RGBAW S, 7ch (12) |
|  Robe Spider, Mode 5, 27ch (10) |  ShowtecSpectral M800 Q4 Tour, Mode AR2.s, 6ch (8) |
|  Atomic 3000 LED, Extended Mode, 14ch (4) | |
|  Luxibel B Blinded, 6ch (10) | |
|  ETC Source 4 Zoom 25°-50°, 1ch (4) | |

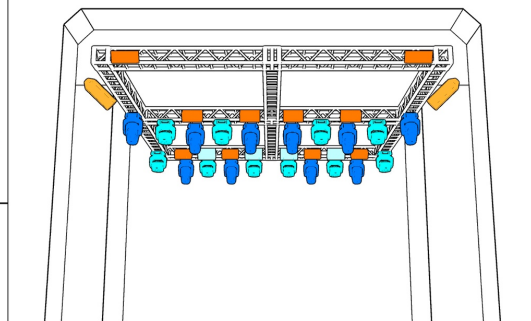


Projekt Name
 Lights Bierhübeli
 Standort
 Bierhübeli
 Autor
 S.S.

Datum
 Januar 2024
 Version
 4.1

Light Plot Stage

Dateiname
 Bierhu'beli_v4_Jan_2024.c2p



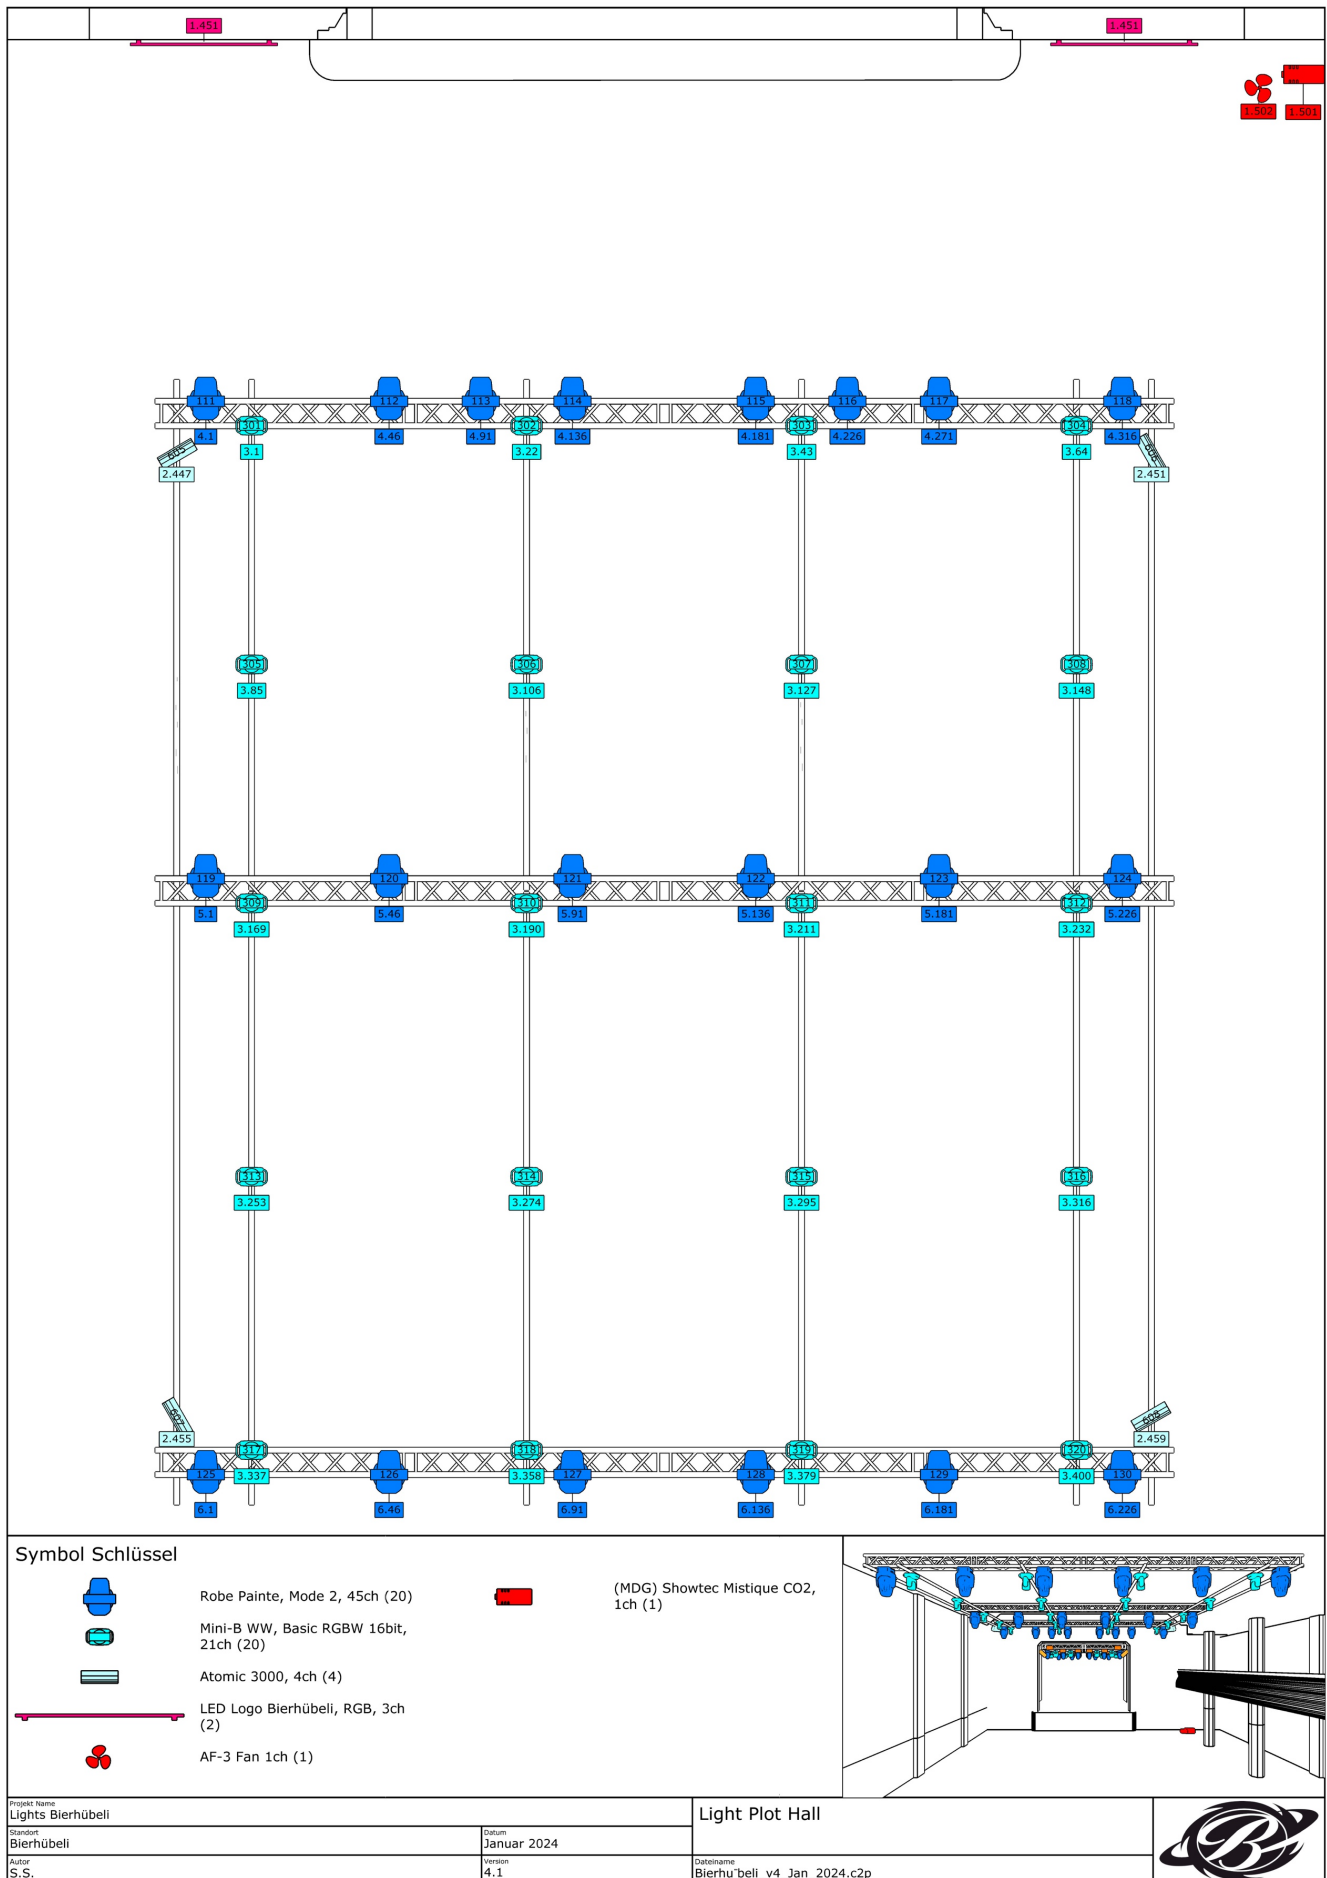

Geräte ID	Patch	Name	Modus	Position
101	1.001	Robe Robin Painte	Mode 2	Stagetruss
102	1.046	Robe Robin Painte	Mode 2	Stagetruss
103	1.091	Robe Robin Painte	Mode 2	Stagetruss
104	1.136	Robe Robin Painte	Mode 2	Stagetruss
105	1.181	Robe Robin Painte	Mode 2	Stagetruss
106	1.226	Robe Robin Painte	Mode 2	Stagetruss
107	1.271	Robe Robin Painte	Mode 2	Stagetruss
108	1.316	Robe Robin Painte	Mode 2	Stagetruss
109	1.361	Robe Robin Painte	Mode 2	Stagetruss
110	1.406	Robe Robin Painte	Mode 2	Stagetruss
111	4.001	Robe Robin Painte	Mode 2	Halltruss 1
112	4.046	Robe Robin Painte	Mode 2	Halltruss 1
113	4.091	Robe Robin Painte	Mode 2	Halltruss 1
114	4.136	Robe Robin Painte	Mode 2	Halltruss 1
115	4.181	Robe Robin Painte	Mode 2	Halltruss 1
116	4.226	Robe Robin Painte	Mode 2	Halltruss 1
117	4.271	Robe Robin Painte	Mode 2	Halltruss 1
118	4.316	Robe Robin Painte	Mode 2	Halltruss 1
119	5.001	Robe Robin Painte	Mode 2	Halltruss 2
120	5.046	Robe Robin Painte	Mode 2	Halltruss 2
121	5.091	Robe Robin Painte	Mode 2	Halltruss 2
122	5.136	Robe Robin Painte	Mode 2	Halltruss 2
123	5.181	Robe Robin Painte	Mode 2	Halltruss 2
124	5.226	Robe Robin Painte	Mode 2	Halltruss 2
125	6.001	Robe Robin Painte	Mode 2	Halltruss 3
126	6.046	Robe Robin Painte	Mode 2	Halltruss 3
127	6.091	Robe Robin Painte	Mode 2	Halltruss 3
128	6.136	Robe Robin Painte	Mode 2	Halltruss 3
129	6.181	Robe Robin Painte	Mode 2	Halltruss 3
130	6.226	Robe Robin Painte	Mode 2	Halltruss 3
201	2.001	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
202	2.028	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
203	2.055	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
204	2.082	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
205	2.109	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
206	2.136	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
207	2.163	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
208	2.019	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
209	2.217	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
210	2.244	Robe Robin Spider	5 Wash [Colour Mixing Mode=RGBW]	Stagetruss
301	3.001	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 1
302	3.022	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 1
303	3.043	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 1
304	3.064	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 1
305	3.085	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 1
306	3.106	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 1
307	3.127	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 1
308	3.148	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 1
309	3.169	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 2
310	3.190	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 2
311	3.211	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 2
312	3.232	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 2
313	3.253	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 2

314	3.274	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 2
315	3.295	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 2
316	3.316	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Hall Pipes 2
317	3.337	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 3
318	3.358	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 3
319	3.379	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 3
320	3.400	Clay Paky Mini-B WW	Basic RGBW 16Bit 2022-06	Halltruss 3
401	7.361	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
402	7.367	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
403	7.373	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
404	7.379	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
405	7.385	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
406	7.391	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
407	7.397	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
408	7.403	Showtec Spectral M800 Q4 Tour	AR2.S Mode	Stagefloor
501	7.001	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
502	7.008	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
503	7.015	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
504	7.022	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
505	7.029	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
506	7.036	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
507	7.043	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
508	7.050	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
509	7.057	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
510	7.064	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
511	7.071	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
512	7.078	Astera AX7 SpotLite	13: DIM RGBAWS [Pixel=1] [Strobe]	Stagefloor
601	2.391	Martin Atomic 3000 LED	14 Channel	Stagetruss
602	2.405	Martin Atomic 3000 LED	14 Channel	Stagetruss
603	2.419	Martin Atomic 3000 LED	14 Channel	Stagetruss
604	2.433	Martin Atomic 3000 LED	14 Channel	Stagetruss
605	2.447	Martin Atomic 3000	4 Channel	Halltruss 1
606	2.451	Martin Atomic 3000	4 Channel	Halltruss 1
607	2.455	Martin Atomic 3000	4 Channel	Halltruss 3
608	2.459	Martin Atomic 3000	4 Channel	Halltruss 3
701	2.331	Luxibel B Blinded	6 Channel Mode	Stagetruss
702	2.337	Luxibel B Blinded	6 Channel Mode	Stagetruss
703	2.343	Luxibel B Blinded	6 Channel Mode	Stagetruss
704	2.349	Luxibel B Blinded	6 Channel Mode	Stagetruss
705	2.355	Luxibel B Blinded	6 Channel Mode	Stagetruss
706	2.361	Luxibel B Blinded	6 Channel Mode	Stagetruss
707	2.367	Luxibel B Blinded	6 Channel Mode	Stagetruss
708	2.373	Luxibel B Blinded	6 Channel Mode	Stagetruss
709	2.379	Luxibel B Blinded	6 Channel Mode	Stagetruss
710	2.385	Luxibel B Blinded	6 Channel Mode	Stagetruss
801	1.451	Bierhübeli Logo RGB	RGB	Hall
801	1.451	Bierhübeli Logo RGB	RGB	Hall
51	1.461	ETC Source 4WRD Zoom 25°-50°	Control	Stagetruss
52	1.462	ETC Source 4WRD Zoom 25°-50°	Control	Stagetruss
901	1.501	Showtec Mistique CO2	1ch Mode	Hall
902	1.502	Martin AF-1 Fan	1ch Mode	Hall

DMX Charts Fixtures

Robe Painte

Mode 2 – 45 Channel

1	Pan
2	Pan fine
3	Tilt
4	Tilt fine
5	Pan/Tilt speed
6	Power/Special Functions
7	LED Frequency
8	LED Frequency fine adj
9	Max light int. Settings
10	Colour wheel
11	Colour wheel fine
12	Cyan
13	Magenta
14	Yellow
15	Virtual CTO
16	Green correction
17	Virtual colour wheel
18	CMY / Colour wheel time
19	Framing time
20	Static gobo wheel
21	Rotating gobo wheel
22	Rotating gobo wheel fine
23	Rot. Gobo index/rotation
24	Rot. Gobo ind./rot. Fine
25	Prism
26	Prism indexing/rotation
27	Frost
28	Iris
29	Iris fine
30	Zoom
31	Zoom fine
32	Focus
33	Focus fine
34	Framing shutt. Mod. rot.
35	Fram. Shut. 1 movement
36	Fram. Shut. 1 swivelling
37	Fram. Shut. 2 movement
38	Fram. Shut. 2 swivelling
39	Fram. Shut. 3 movement
40	Fram. Shut. 3 swivelling
41	Fram. Shut. 4 movement
42	Fram. Shut. 4 swivelling
43	Shutter / strobe
44	Dimmer
45	Dimmer fine

Robe Spider

Mode 5 – 27 Channel

1	Pan
2	Pan fine
3	Tilt
4	Tilt fine
5	Pan/Tilt speed
6	Power/Special Functions
7	Background – V. colour wheel
8	Backgrnd – Red / Cyan
9	Backgrnd – Green / Mag.
10	Backgrnd – Blue / Yellow
11	Backgrnd – White
12	Backgrnd – CTC
13	Backgrnd – Shutter
14	Backgrnd – Dimmer
15	Backgrnd – Active zone
16	Colour mix control
17	Flower Effect
18	Fower Effect Red
19	Flower Effect Green
20	Flower Effect Blue
21	Flower Effect White
22	Flower Effect Colour Macro
23	Flower Effect Shutter
24	Flower Effect Dimmer
25	Zoom
26	Master Shutter
27	Master Dimmer

Luxibel B-Blinded

6-Channel Mode – 6 Channel

1	Dimmer left
2	Dimmer left fine
3	Dimmer right
4	Dimmer right fine
5	Dimmer Master
6	Strobe

Claypaky Mini-B WW

Basic RGBW 16bit – 21 Channel

1	Red
2	Red fine
3	Green
4	Green fine
5	Blue
6	Blue fine
7	White
8	White fine
9	CTO
10	Macro Colour
11	Strobe
12	Dimmer
13	Dimmer fine
14	Pan
15	Pan fine
16	Tilt
17	Tilt fine
18	Zoom
19	Colour crossfade
20	Function
21	Reset

Atomic 3000 LED

Extended Mode – 14 Channel

1	Beam flash intensity
2	Beam flash duration
3	Beam flash rate
4	Beam special effects
5	Control / settings
6	FX select
7	FX adjustment
8	FX synchronization
9	Aura strobe
10	Aura dimmer
11	Aura red
12	Aura green
13	Aura blue